

Twin LNB Upgrade Kit



Product Code: BLNBUTK
Barcode: 6007516002522



- Digital low noise twin LNB
- Water resistant
- F-Connector Assembly

TECHNICAL INFORMATION

Specifications:


Frequency Range:	Low Band: 10.7 - 11.7 GHz High Band: 11.7 - 12.75 GHz
L.O. Frequency:	Low Band 9.75GHz High Band 10.7 GHz
L.O. Frequency Stability:	+/- 1.0MHz Max at +25oC +/- 2.0MHz Max at 40 Degrees Celsius +60 Degrees Celsius
Output Frequency:	Low Band 950 - 1950MHz High Band 1000 - 2050MHz
Noise Figure:	Low Band 0.6dB Type High Band 0.6dB Type
Conversion Gain:	53dB - Min 63dB - Max
Gain Flatness:	+ 0.5dB - 26MHz
L.O. Phase Noise:	50dBc - Hz at 1 KHz 75dBc - Hz at 10KHz 95dBc - Hz at 100 KHz
Cross POL. Isolation:	25dB Type
Image Rejection	40dB Min
Output VSWR:	2.0:1
DC Current Consumption:	160mA Max
Low & High Bands Switching:	Low 0KHz High 22KHz +/-4KHz
POL. Switching Voltage:	Vertical 10.5 - 14V Horizontal 16 - 20V
Output Connector:	F-Type Female 75W
Operating Temperature:	-40 Degrees Celsius +60 Degrees Celsius

Diagram


CABLE STRIPPING



F-CONNECTOR ASSEMBLY

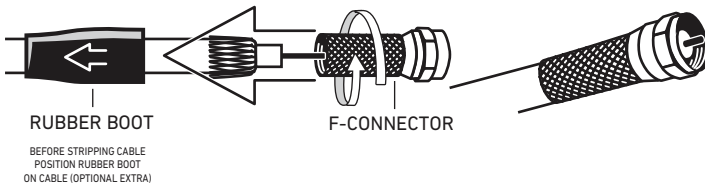

DIGITAL LOW NOISE TWIN LNB. WATER RESISTANT.

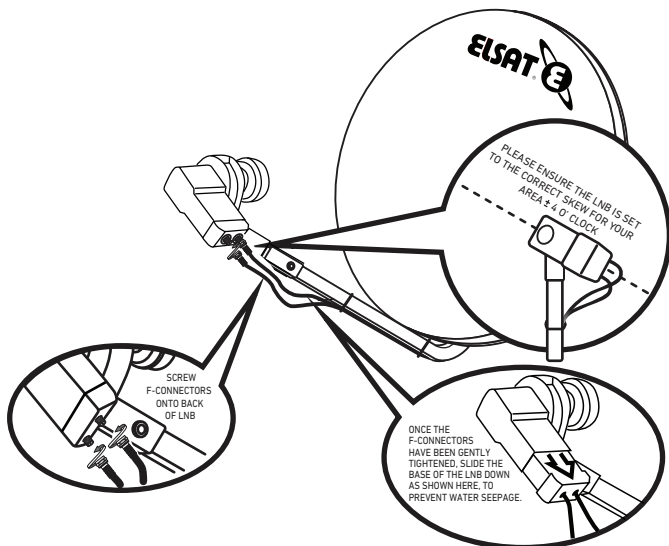

THE PACKAGE CONTAIN

- 1 x Twin LNB
- 2 x Amalgamating Tape
- 1 x Metal Back to Back Coupler
- 20 x 7mm Cable Saddles
- 2 x F-Connectors
- 20m RG6 Double Screened Cable

PACKAGE DIMENSIONS



	Height (mm)	Depth (mm)	Width (mm)	Weight (kg)	QTY
Blister	120	240	250	1	1
Carton	260	400	500	8.18	8