


Industrial Mixer Amplifier



Product Code: **DPA40AP**
Barcode: 6002844001551

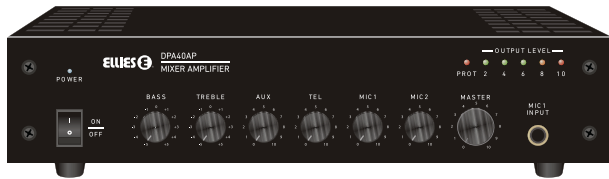

- Mixer amplifier for paging and background music system
- Mic 1 input with a combined connector:
 - 1/4" phone jack
 - XLR with phantom power
- Mic 2 with 1/4" phone jack
- Aux 1 input with dual RCA
- Tel input with phoenix connector
- Line output with dual RCA type
- Mic with Vox priority (with Vox level control)
- Telephone input with secondary input over all other inputs
- 100V, 70V and 4-16 ohms speaker output
- AC 120V or 230V operation
- Mic 1-2, Aux 1
- Tel master volume control and bass/treble tone control
- High temperature, short-circuit and overload protection

TECHNICAL INFORMATION

Specifications:	
Rated Power Output (RMS)	40W (Peak Power 60W)
Speaker Outputs	70V, 100V & 4~16 ohms
Input Sensitivity & Impedance	Mic 1, 2: 5mV/600 ohms, Unbalanced TRS input Mic1: -2.5mV/2K ohms TEL: -175mV/10K ohms AUX: 350mV/10K ohms, Unbalanced RCA input
Output Sensitivity & Impedance	Line Out: 1V/470 ohms, Unbalanced RCA output
Overload Electromotive Force	Mic 1, 2: 10dB Mic 1: 15dB AUX: 15dB, Unbalanced RCA input TEL: 12dB
Tone	Bass: -10dB, Treble: -10dB
Frequency Response	50Hz~16KHz (+1dB, -3dB)
S/N Ratio	MIC: 66dB, AUX: 80dB
THD	Less than 0.3% at 1KHz, 1/3 rated power
Muting Function	MIC 1 overrides other input signals with 30dB attenuation
Crosstalk	-50dB
Phantom Power	+48V
Cooling	Button-up convert automatic cool
Protection	High temp, overload & short-circuit
Power Supply	~110V/60Hz or ~230V/50Hz or DC 24V
Power Consumption	70W
Weight	3Kg
Dimensions	360x274x66mm
Finish	Panel: aluminum plate, black Case: steel plate, black

Optional

- DC 24V

THE PACKAGE CONTAINS



1 x Industrial Mixer Amplifier
1 x Mains Cable


Industrial Mixer Amplifier



Product Code: DPA40AP

Barcode: 6002844001551

Rear Panel

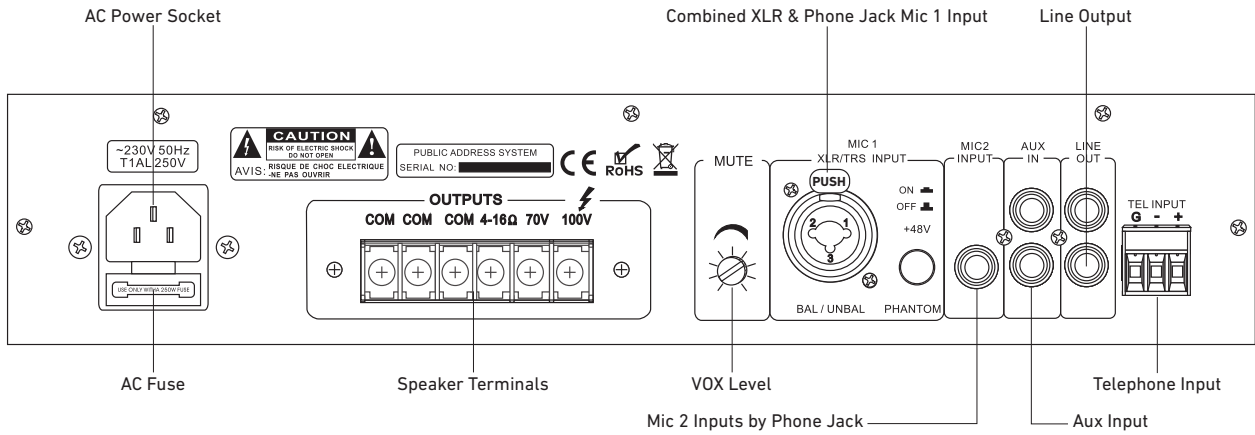

Connections

