

# HDMI Splitter

## 1 x 4



Product Code: **BAHDMIS4**  
Barcode: **6002844000998**




### HDMI Splitter


The HDMI Splitter has 1 x HDMI input and 4 x HDMI outputs. The HDMI splitter uses a single HDMI source and splits it to multiple HDMI compatible monitors / projectors. The 4 can also be placed at the end of a long HDMI cable to regenerate the HDMI signal.

The HDMI Splitter offers solutions for security surveillance, data centre control, information distribution, conference room presentations, school and corporate training environments.

### Digram

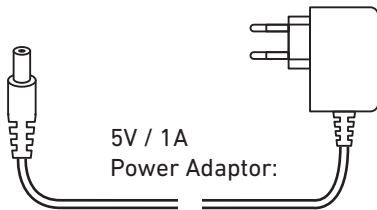


#### Front Panel

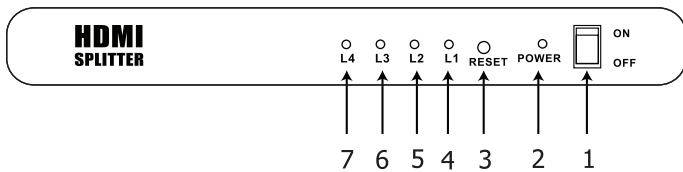

- 1 ON/OFF
- 2 Power indicator
- 3 Press "Reset" to re-start HDMI Splitter.
- 4 HDMI output 1 indicator
- 5 HDMI output 2 indicator
- 6 HDMI output 3 indicator
- 7 HDMI output 4 indicator

#### Rear Panel



- Support 3D.
- Supports up to 15 meter HDMI cable inputs.
- Support Audio Return Channel, ARC.
- HDCP 1.2 protocol compliant.
- Higher resolution format: 3840x2160 24Hz/25Hz/30Hz; 4096x2160 24Hz



### TECHNICAL INFORMATION

#### Specifications:

HDMI resolution	1080p/1080i; 3840x2160 24Hz/25Hz/30Hz; 4096x2160 24Hz
Video format	24bit/deep color 30bit, 36bit/sY CC601, Adobe RGB, AdobeY CC601
Max bandwidth	340MHZ
Max baud rate	10.2Gbps
Input/Output TMDS signal	0.5 - 1.5 Volts p-p (TTL)
Input/Output DDC signal	5 Volts p-p (TTL)
Input cable distance	≤ 15m AWG26 HDMI 1.4 standard cable
Input cable distance	≤ 25m AWG26 HDMI 1.4 standard cable
Max working current	600mA
Power adaptor format,	Input: AC (50HZ,60HZ) 100V-240V Output: DC5V/1A
Operating Temperature range	(-15 to+55 °C)
Operating Humidity range	5 to 90% RH (No Condensation)

### CONTENTS

- 1 x HDMI Splitter - 4 in 1 port
- 1 x Instruction Manual

### PACKAGING DIMENSIONS



Height (mm)	Depth (mm)	Width (mm)	Weight (kg)
149	74	216	0.47