



- Supports up to 4Kx2K High Definition resolution.
- Supports smart EDID and ARC functions.
- Supports digital audio format: DTS-HD/Dolby-True HD / LPCM7.1 / AC3 / DTS / DSD.

TECHNICAL INFORMATION

HDMI to HDMI + Toslink + Audio Extractor

The MINI HDMI to HDMI+Audio extractor increases the analog stereo and digital toslink audio output. On basis of the HDMI signal transmission. The audio signal can be easily connected to earphones or a digital audio power amplifier.


Operation controls and Functions



- 1 HDMI OUT: Connect the HDTV or monitor with HDMI cable for input source display.
- 2 SPDIF OUT: Connect to the audio amplifier with optical fiber cable.
- 3 R: Analog audio Right channel output.
- 4 L: Analog audio Left channel output.
- 5 DC 5V IN: Plug the 5V DC power supply into the unit and connect the adapter to AC wall outlet.
- 6 POWER LED: This red LED illuminates when the device is connected with the power supply.
- 7 EDID Switch: Press this to select the 2.0CH,5.1CH,TV EDID to source.
- 8 ARC KEY: Press this button to enable & disable ARC function.
- 9 ARC LED: This red LED illuminates when ARC enable, and no LED lights up when disable.
- 10 HDMI input: This slot is where you connect the HDMI source output from DVD, PS3, Decoder or Note Book.

Frequency Bandwidth:	297MHz[10.2Gbps]
Input Ports:	1 x HDMI Female port.
Output port:	1 x HDMI Female port,1x Toslink,1x RCA
HDMI Audio Output:	PCM2, 5.1, 7.1CH, Dolby 5.1, DTS5.1, D-TrueHD, DTS-HD
Power Supply:	5V/1A DC (US/EU standards, CE/FCC/UL certified) ESD Protection
Human Body Model:	± 8kV (air-gap discharge) ± 4kV (contact discharge)
Product Dimensions (mm):	60(W) X 70 (D) X 20 (H)
Weight (g):	125 g
Operating Temperature:	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature:	-20°C ~ 60°C / -4°F ~ 140°F

Application Example

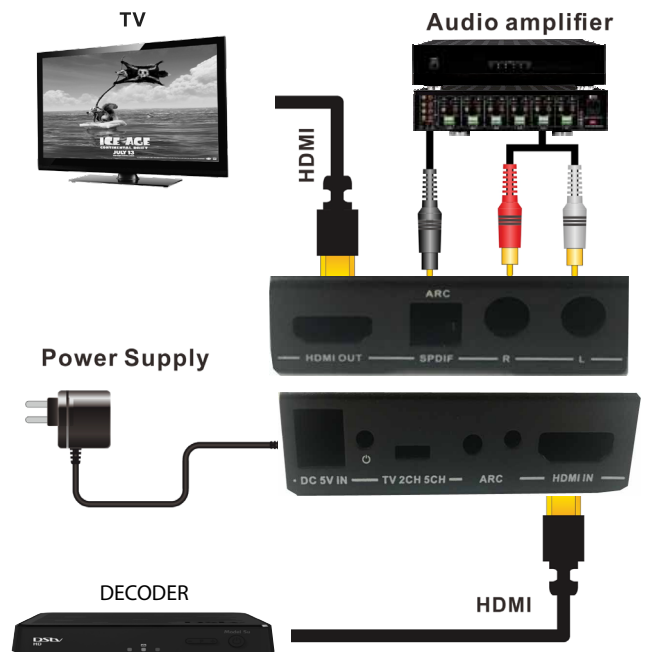

PACKAGE CONTENT

- 1 x VGA 2 HDMI Converter
- 1 x USB Cable
- 1 x User Manual

PACKAGE DIMENSIONS



Height (mm)	Depth (mm)	Width (mm)	Weight (kg)	QTY
135	25	95	0.126	1