




## About the Remote Monitor

The Remote Monitor for charge controllers connects to a charge controller by a supplied 2m cable and displays relevant information about the system and allows adjustment of parameters and the control of the load/lights output.

- Automatically identifies the charge controller model number and is compatible with the Ellies FSR range of Charge Controllers.
- Large-screen informative LCD displays all the operating data and system working status in graphic and textual forms.
- Displays relevant parameter data like: PV Modules and battery voltage and current and daily/monthly/totals of Charge and discharge energy in KWh.
- Simple and convenient operation
- Real-time alarm of failure information
- Longer communication distance of up to 50M based on RS485
- Diversified load control modes: Manual Control, Light ON/OFF,
- Light ON+ Timer, Time Control
- Allows the adjustment of all battery charging parameters with the "user" battery type
- Energy statistics display function
- Battery type selection: Gel, sealed, flooded and User (programmable)


## TECHNICAL INFORMATION

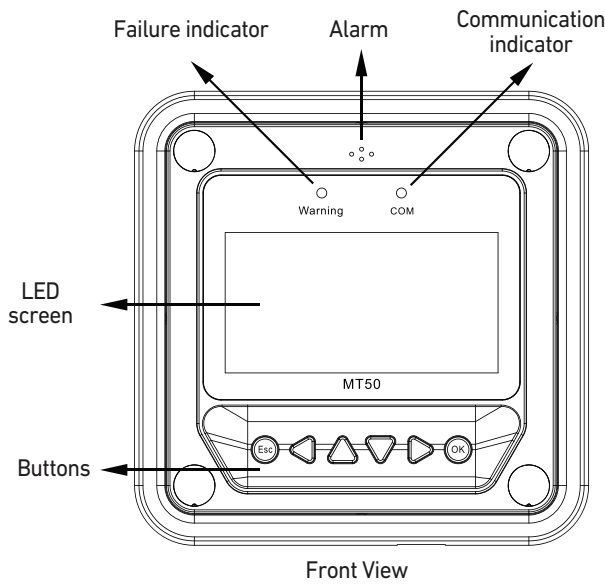

Electrical parameter	
Self-consumption	Backlight and acoustic alarm ON <65mA
	Backlight ON <23mA
	Backlight OFF <15mA
Mechanical parameter	
Faceplate dimensions	F98×98 mm
Frame dimensions	114×114 mm
Connector type	RJ45
Meter cable	Standard 2m,Max 50 m
Meter weight	Simple package: 0.23 Kg Standard package:0.32 Kg
Environmental parameter	
Ambient temperature	-20 ~+70 /-4 ~158

## PACKAGE CONTENTS

1 x Controller unit



	Height (mm)	Depth (mm)	Width (mm)	Weight (kg)	QTY
Giftbox	75	129	129	0.24	1
Bulk					