













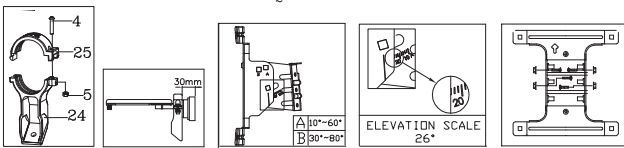

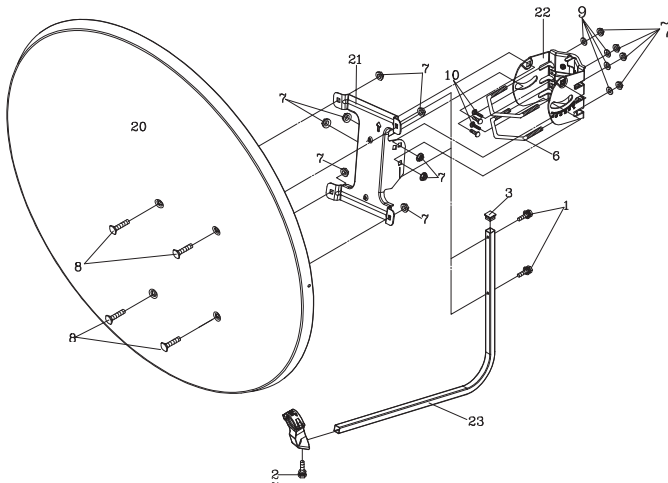



## 75cm satellite dish

Ideal for high definition satellite reception.  
Outdoor installation



25		40mm LNB CLAMP	1
24		40mm LNB CLAMP HOLDER	1
23		LNB Arm	1
22		F/Mast Bracket	1
21		Reflector Bracket	1
20		Reflector	1
10		M6*15 round-head screw	4
9		M6 Washer	4
8		M6*15 Round Flat Head Square Screw	4
7		M6 flange nut	12
6		M6*W53 U Square bolt	2
5		M4 hex nut	1
4		M4*20 Round-head cross screw	1
3		cover	1
2		M6*12 hex-head cap screw w/sw/w	1
1		M6*30 hex-head cap screw w/w	2
NO.	ITEM	DESCRIPTION	Q'TY


- 1 year warranty
- Easy to assemble

## TECHNICAL INFORMATION

### Specifications:

Item & Spec.	DE80
Offset Angle	22.75
Effective Physical Size (cm)	W75xH81
Focus Length (mm)	492
S-band Gain @ 2.5GHZ	25.7dB
C-band Gain @ 4.0GHZ	-
Ku-band Gain @ 12.5GHZ	38.63dB
Elevation	15°~75°/10°~80°/0°~90°
Azimuth	0°~360°
Aperture Efficiency	75% (min)
F/D Ratio	0.65
Weight	4.5kg
Material	Mild Steel
Finishing	Polyester Powder
Color	Gray/Cool Gray
Standard Mount	G/P/W
Pole diameter Acceptable (mm)	38~50
Ambient Temperature	-40°~+60°C
Relative Humidity	0~100%

## THE PACKAGE CONTAINS

 1 x (75cm x 81cm) Satellite Dish

## PACKAGE DIMENSIONS



Height (mm)	Depth (mm)	Width (mm)	Weight (kg)
870	84	935	8.5